

Sole Verde


# SV-580M N-type Bifacial

580 W · 1500V max system

N-type TOPCon bifacial double-glass — 22.45% efficiency, up to 80% rear-side gain, TÜV SÜD 2–3× IEC tested.

SPECIFICATIONS

|                        |                                     |
|------------------------|-------------------------------------|
| Imp                    | 13.18A                              |
| Isc                    | 13.95A                              |
| Vmp                    | 44.02V                              |
| Voc                    | 52.52V                              |
| Cells                  | 144 N-type TOPCon half-cut (6×12×2) |
| Dimensions             | 2278 × 1134 × 30 mm · 30.3kg        |
| Efficiency             | 22.45% (STC)                        |
| PID resistance         | 85°C / 85% humidity, 192h tested    |
| Rear-side gain         | Up to 80 ±5%                        |
| Max system voltage     | DC1500V (IEC)                       |
| Rated power (Pmax)     | 580W STC · 440W NOCT                |
| Temp. coefficient Pmax | -0.29%/°C                           |

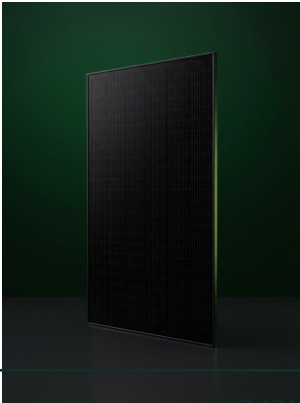

Enquire on WhatsApp

+971529741660

"https://soleverde-backoffice-production.up.railway.app"VAPID\_PUBLIC\_KEY=BDSCdM\_pCHlQGbjEwtr6G7cmlkN0E1dWw9

Specifications subject to change without notice. Full warranty terms ship with the product.

